



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

22553 U.S. PTO  
10/763927



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*Stephen Hordley*

Dated 23 December 2003


**THIS PAGE BLANK (USPTO)**



03JUN03 EB11856-11 D00016  
F01/7700:0.00-0312633.1

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

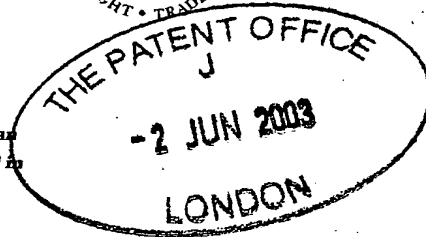

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

DSW/02617

2. Patent application number

(The Patent Office will fill in this part)

0312633.1

3. Full name, address and postcode of the or of each applicant (underline all surnames)

RADIX SYSTEMS LIMITED  
Unit D3/D4 Premier Centre  
Abbey Park  
Romsey  
Hampshire SO51 9AQ

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4142857002

4. Title of the invention

Method and apparatus for processing articles

5. Name of your agent (if you have one)

BROOKES BATCHELLOR

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

102-108 Clerkenwell Road  
London EC1M 5SA

Patents ADP number (if you know it)

08142291001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

UK

0301687.0

24.01.2003

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description 5

Claim(s) 2

Abstract

Drawing(s) 4  $\times$   $\times$

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

*Brookes Batchellor*

Date

Brookes Batchellor

30/05/2003

12. Name and daytime telephone number of person to contact in the United Kingdom

D. S. Weitzel

020 7253 1563

### Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

## METHOD AND APPARATUS FOR PROCESSING ARTICLES

This invention relates to a method and apparatus for processing articles.


The background to the invention will be explained with respect to particular applications. The invention is not limited to these, however, and other applications may  
5 occur readily to the reader.

Some articles are spun to dry them, e.g. after washing. Examples are "prepared" leaf vegetables e.g. green salad vegetables. Conventionally, they are loaded into a "spin dryer" drum in batches, spun dry and then the batch is emptied from the drum. It would be advantageous to use a continuous process instead of a batch process.

10 Against this background, the invention provides apparatus for processing articles, comprising a hollow drum having permeable walls, at one end an inlet for receiving articles onto an inside surface of the permeable walls; at the other end an outlet for discharging articles from the drum; means for rotating the drum about an axis having at least a horizontal component at such speed that centrifugal force acting on the articles is  
15 sufficient to overcome the gravity, and progressing means for applying a first jet of fluid to the articles through the permeable wall, to displace the articles from the inside surface and in a direction away from the inlet, towards the outlet.

In one application, the process is used to dry the articles. The speed of rotation of the drum may be chosen to suit the degree of drying required, and the displacement of  
20 the article by the jet of fluid may turn the article so that liquid which might otherwise lie trapped on an inward side of the article lying towards the centre of the drum, is repositioned outwardly away from the centre of the drum.

In another application the process is used to inspect the articles. In the preparation of leaf "prepared" vegetables, e.g. salads, spinach etc, the vegetables are  
25 inspected for blemishes and the presence of pests, e.g. caterpillars, slugs and insects. Inspection is difficult, for example leaves tend to stick together, pests tend to hide in folds in the leaves, and turning the leaves to view all surfaces is difficult and onerous.

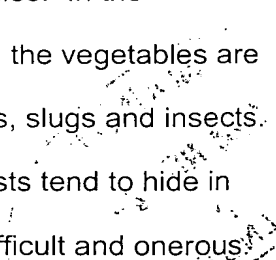

Inspection is carried out manually. Operatives turn and inspect the product as it passes on a moving belt. There are a small but significant number of blemishes and pests missed.

Whilst it is not envisaged that such problems can be totally eliminated, as the jet progresses the article, it is likely to turn it over. Most preferably, one or more first jets  
5 are sufficient to give a very high chance of the articles being turned in passage through the drum thus enabling all faces of the articles to be inspected.

In this application, the apparatus preferably includes rejection means for selectively applying a second jet of fluid to project rejected articles into means for  
10 removing rejected articles from the drum.

Dependent on the characteristics of the articles and the material of the drum, the articles can be inspected from inside or outside the drum. Preferred apparatus includes inspection means directed at the outside surface of the permeable wall, and control means responsive to the output from camera to reject articles according to  
15 predetermined criteria and to operate said rejection means to apply said second jet of fluid selectively to remove the rejected articles.

The rejection means is preferably operable to apply a plurality of second jets individually selectable, and wherein the control means is operative to analyse output from the inspection means to select one or more second jets.

20 The inspection means is a preferably line scan camera, used in conjunction with illumination means to detect reflected light.

In order to ensure an article is conveyed round the drum between successive visits to a or the first jet this is arranged to displace articles in a direction having a component normal and in the direction of rotation.

25 The invention also extends to a method for processing articles, comprising conveying the articles through an inlet and onto an inside surface of permeable walls of a hollow drum; rotating the drum about an axis having at least a horizontal component at

such speed that centrifugal force acting on the articles is sufficient to overcome the force of gravity acting on the articles, and applying a first jet of fluid to the articles through the permeable wall, to displace the articles from the inside surface and in a direction away from the inlet.

5           One embodiment of the invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a schematic pictorial view of inspection apparatus embodying the invention;

Figure 2 is an end view of the apparatus of Figure 1; and

10           Figures 3a and 3b show two views of a combined drying and two-stage inspection apparatus.

Referring to the drawings, a hollow drum 2 has open ends 6 and 8 and permeable walls 10. The walls may, for example be a perforate sheet material or mesh. The drum 2 is supported at each end by four rollers 12 (shown only at one end in the drawings) at  
15           least one of which is driven so as to rotate the drum about an axis X-X which is or has at least a component which is horizontal. Generally the axis will be horizontal. The drum is driven at such a speed that articles, e.g. leaf vegetables, introduced at the end 8, constituting an inlet, and falling onto the inside surface of the walls 10 are, unless rejected, carried in a complete revolution round the drum as it rotates. That is the  
20           centrifugal force on the leaves is sufficient to overcome the force of gravity.

As the leaves pass an inspection line 14, they are illuminated by light sources 16. The inspection line 14 is viewed by a line scan camera 18 which provides a pixel by pixel output to control means (not shown) which is operative to compare the output with predetermined criteria to determine whether an article is acceptable or should be  
25           rejected, e.g. to identify a blemish or pest on a leaf. The criteria may be based on colour or other physical or biological properties of the product under inspection.

A conveyor or flume 22 extends inside the length of the drum at such a position that articles pass it subsequent to passing the line of inspection 14. If the control means (not illustrated) determines that an article should be rejected it is projected into the conveyor or flume to be transported out of the drum into a receptacle for rejected articles (not shown). For this purpose a rejection bar 24 containing a plurality of fluid e.g. air jets, not illustrated individually, but individually selectable, is positioned outside the drum directed inwardly towards the conveyor or flume. The control means (not illustrated) is arranged to select one or more of the bar 24 jets to operate at a suitable time after the detection of a reject article, to propel the article into the conveyor or flume 22.

As or if the revolving leaf moves on from the rejection bar 24 and conveyor or flume 22 it passes a jet bar 20. This is approximately parallel to the axis X-X and contains a plurality of fluid, e.g. air jets directed to have a component parallel to the axis X-X and a component in the direction of rotation R, that is normal to the axis X-X. The jets propel the leaves off the drum, against the force of gravity and the centrifugal force, and project it away from the inlet towards the outlet and a little round the drum in the direction of rotation so that when it falls by force of the air jet and of gravity it completes remainder of another revolution, this time nearer the outlet, past the line of inspection 14 unless rejected. The action of the jets in the jet bar 20 is intended also to turn the article over. The drum 2 and the jet bar 20 are sufficiently long that in passage from one end 8 of the drum to the other 6, there is a high probability that an article will be turned over sufficiently for all its surfaces to be inspected and/or dried. The direction and force of each jet can be tailored to a particular product and individually selected to increase this probability.

The walls 10 are transparent perforate material, so that the articles on the inspection line 14 can be inspected from outside the drum. Transparency may be provided by the material and/or the construction of the drum, e.g. by an open mesh or large perforations.



If the physical attributes (e.g. size) of the articles, or the material, or the construction of walls 10 do not allow for the inspection from the outside of the drum, it would be possible, to inspect the articles on the inspection line 14 from the inside of the drum 2 but some of the components will require alternative positioning.

In Figures 3a and 3b, three drums 10 are placed end to end, so that the articles pass from one to another. Only one of the drums is provided with inspection and rejection apparatus. The others are used to dry the articles by a combination of centrifugal force and air drying. The order in which a number of the drums 10 are arranged will probably be that illustrated, so that articles are dried first then inspected. The drying drums may rotate faster than the inspecting drum.

## CLAIMS

1. Apparatus for processing articles, comprising a hollow drum having permeable walls, at one end an inlet for receiving articles onto an inside surface of the permeable walls; at the other end an outlet for discharging articles from the drum; means  
5 for rotating the drum about an axis having at least a horizontal component at such speed that centrifugal force acting on the articles is sufficient to overcome the gravity, and progressing means for applying a first jet of fluid to the articles through the permeable wall, to displace the articles from the inside surface and in a direction away from the inlet towards the outlet.
- 10 2. Apparatus as claimed in claim 1, including rejection means for selectively applying a second jet of fluid to project rejected articles into means for removing rejected articles from the drum.
- 15 3. Apparatus as claimed in claim 1 or 2, including inspection means directed at the inside surface of the permeable wall, and control means responsive to the output from inspection means to reject articles according to predetermined criteria and to operate said rejection means to apply said second jet of fluid selectively to remove the rejected articles.
- 20 4. Apparatus as claimed in claim 2, wherein the walls of the drum are transparent and including inspection means directed at the outside surface of the wall; and control means responsive to the output from the inspection means to reject articles according to predetermined criteria and to operate said rejection means to apply said second jet of fluid selectively to remove the rejected unwanted articles.
- 25 5. Apparatus as claimed in claim 3 or 4, wherein the rejection means is operable to apply a plurality of second jets selectively, and wherein the control means is operative to analyse output from the camera to select one or more second jets.
6. Apparatus as claimed in claim 5, wherein the inspection means is a line scan camera.

7. Apparatus as claimed in any preceding claim, wherein the first jet is arranged to displace articles in a direction having a component normal and towards the axis of the drum and a component parallel to the axis and towards the outlet of the drum.


8. A plurality of apparatus as claimed in any preceding claim arranged in sequence so that the outlet of one drum acts as an inlet to the next one.

9. A method for processing articles, comprising conveying the articles through an inlet and onto an inside surface of permeable walls of a hollow drum; rotating the drum about an axis having at least a horizontal component at such speed that centrifugal force acting on the articles is sufficient to overcome the gravity, acting on the articles, and applying a first jet of fluid to the articles through the permeable wall, to displace the articles from the inside surface and in a direction away from the inlet.

10. A method as claimed in claim 9, including selectively applying a second jet of fluid to project rejected articles into means for removing rejected articles from the drum.


11. A method as claimed in claim 9 or 10, including inspecting articles directed at the inside surface of the permeable wall, and rejecting articles according to predetermined criteria and applying said second jet of fluid selectively to remove the rejected articles.

12. A method as claimed in claim 11, including analysing output from the camera to select one or more second jets.

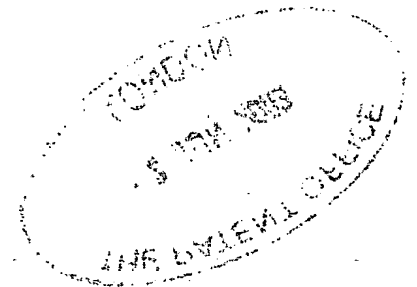


**THIS PAGE BLANK (USPTO)**

Fig. 1

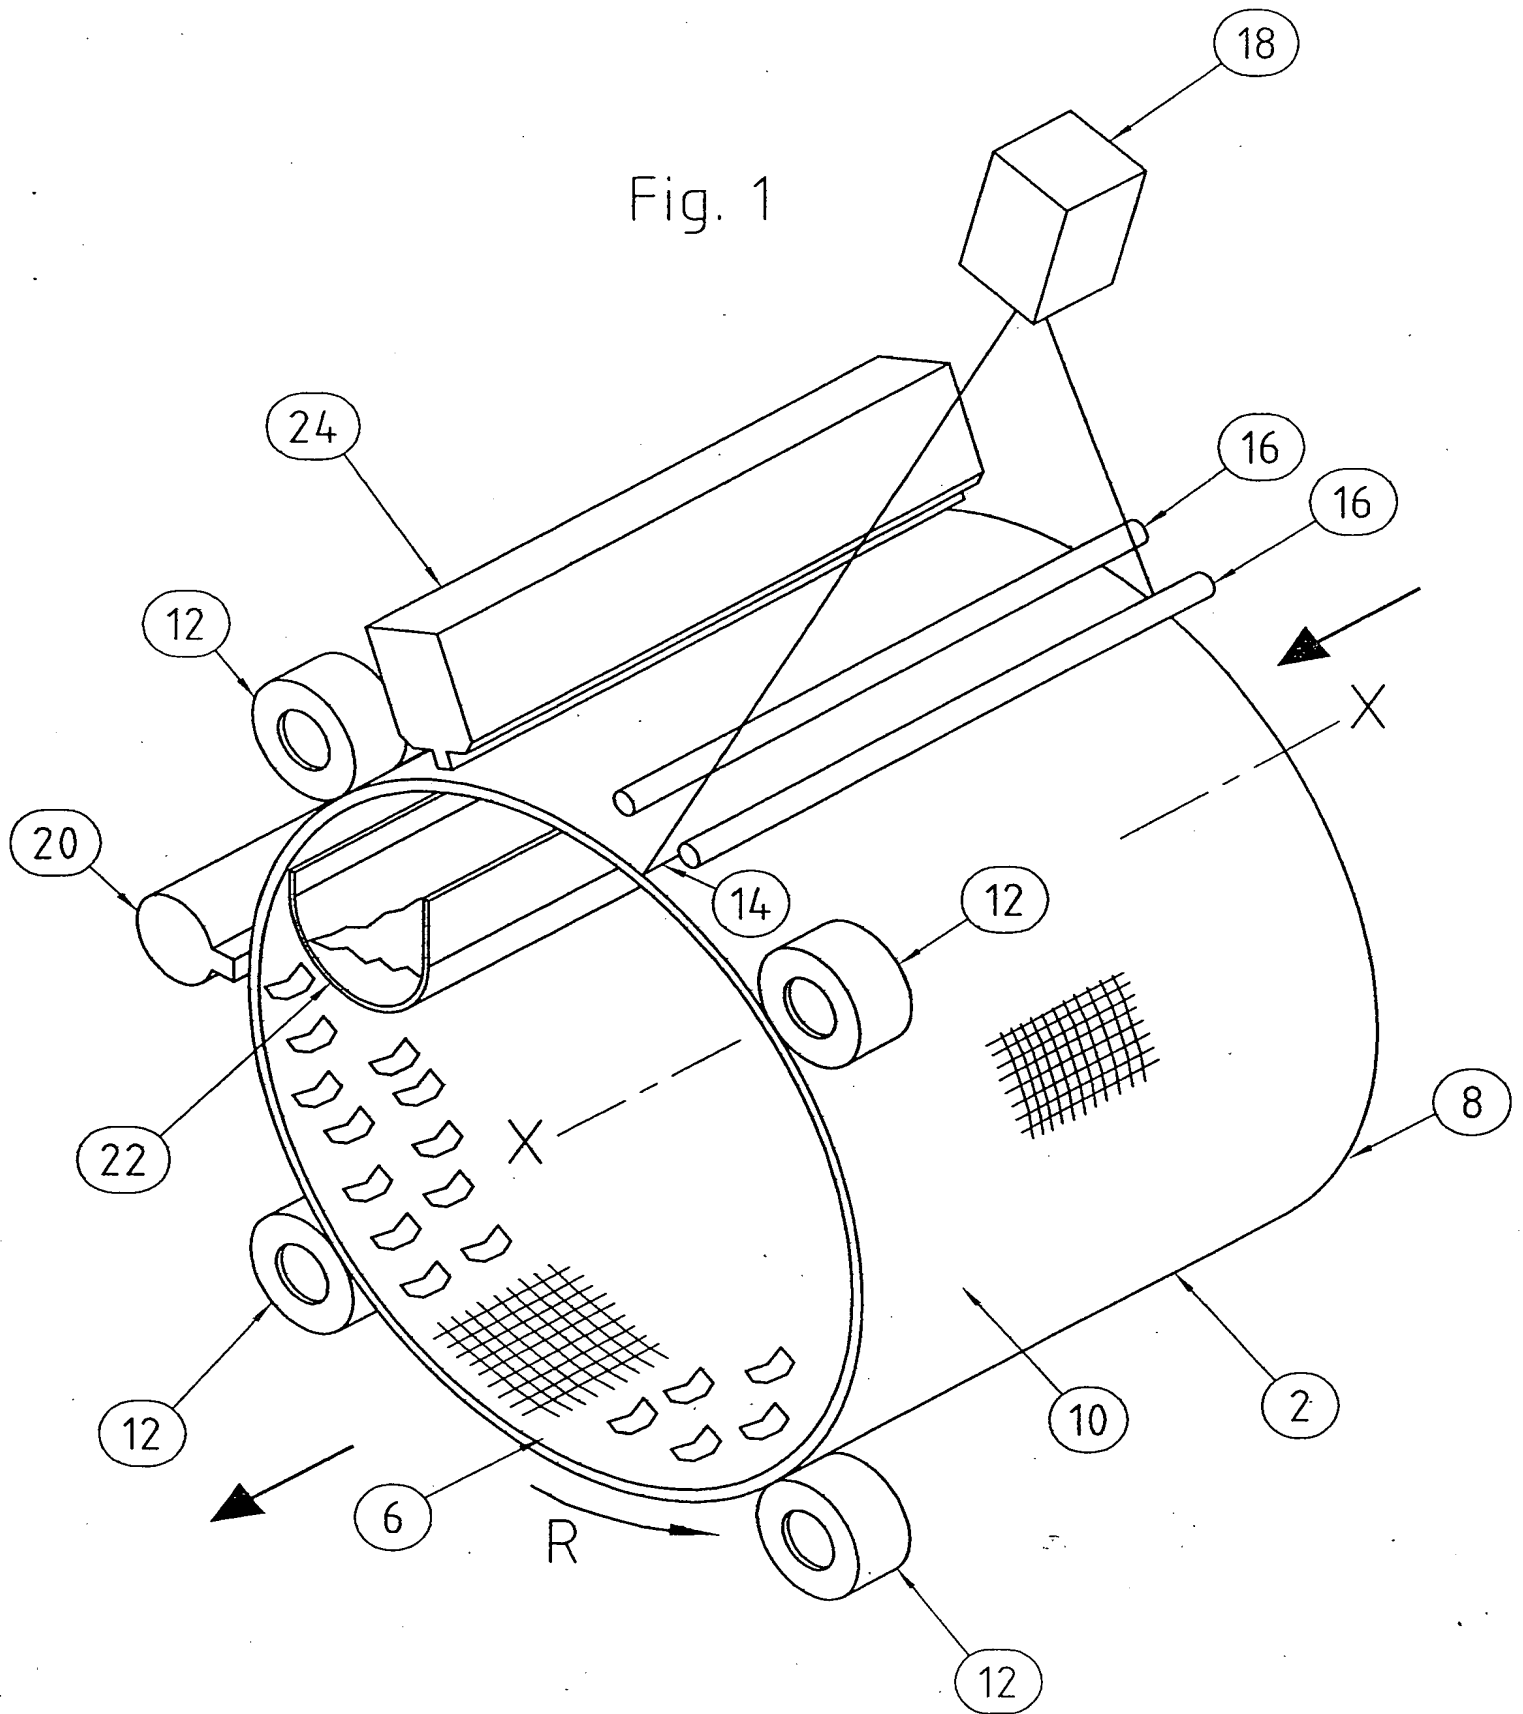

**THIS PAGE BLANK (USPTO)**

Fig. 2

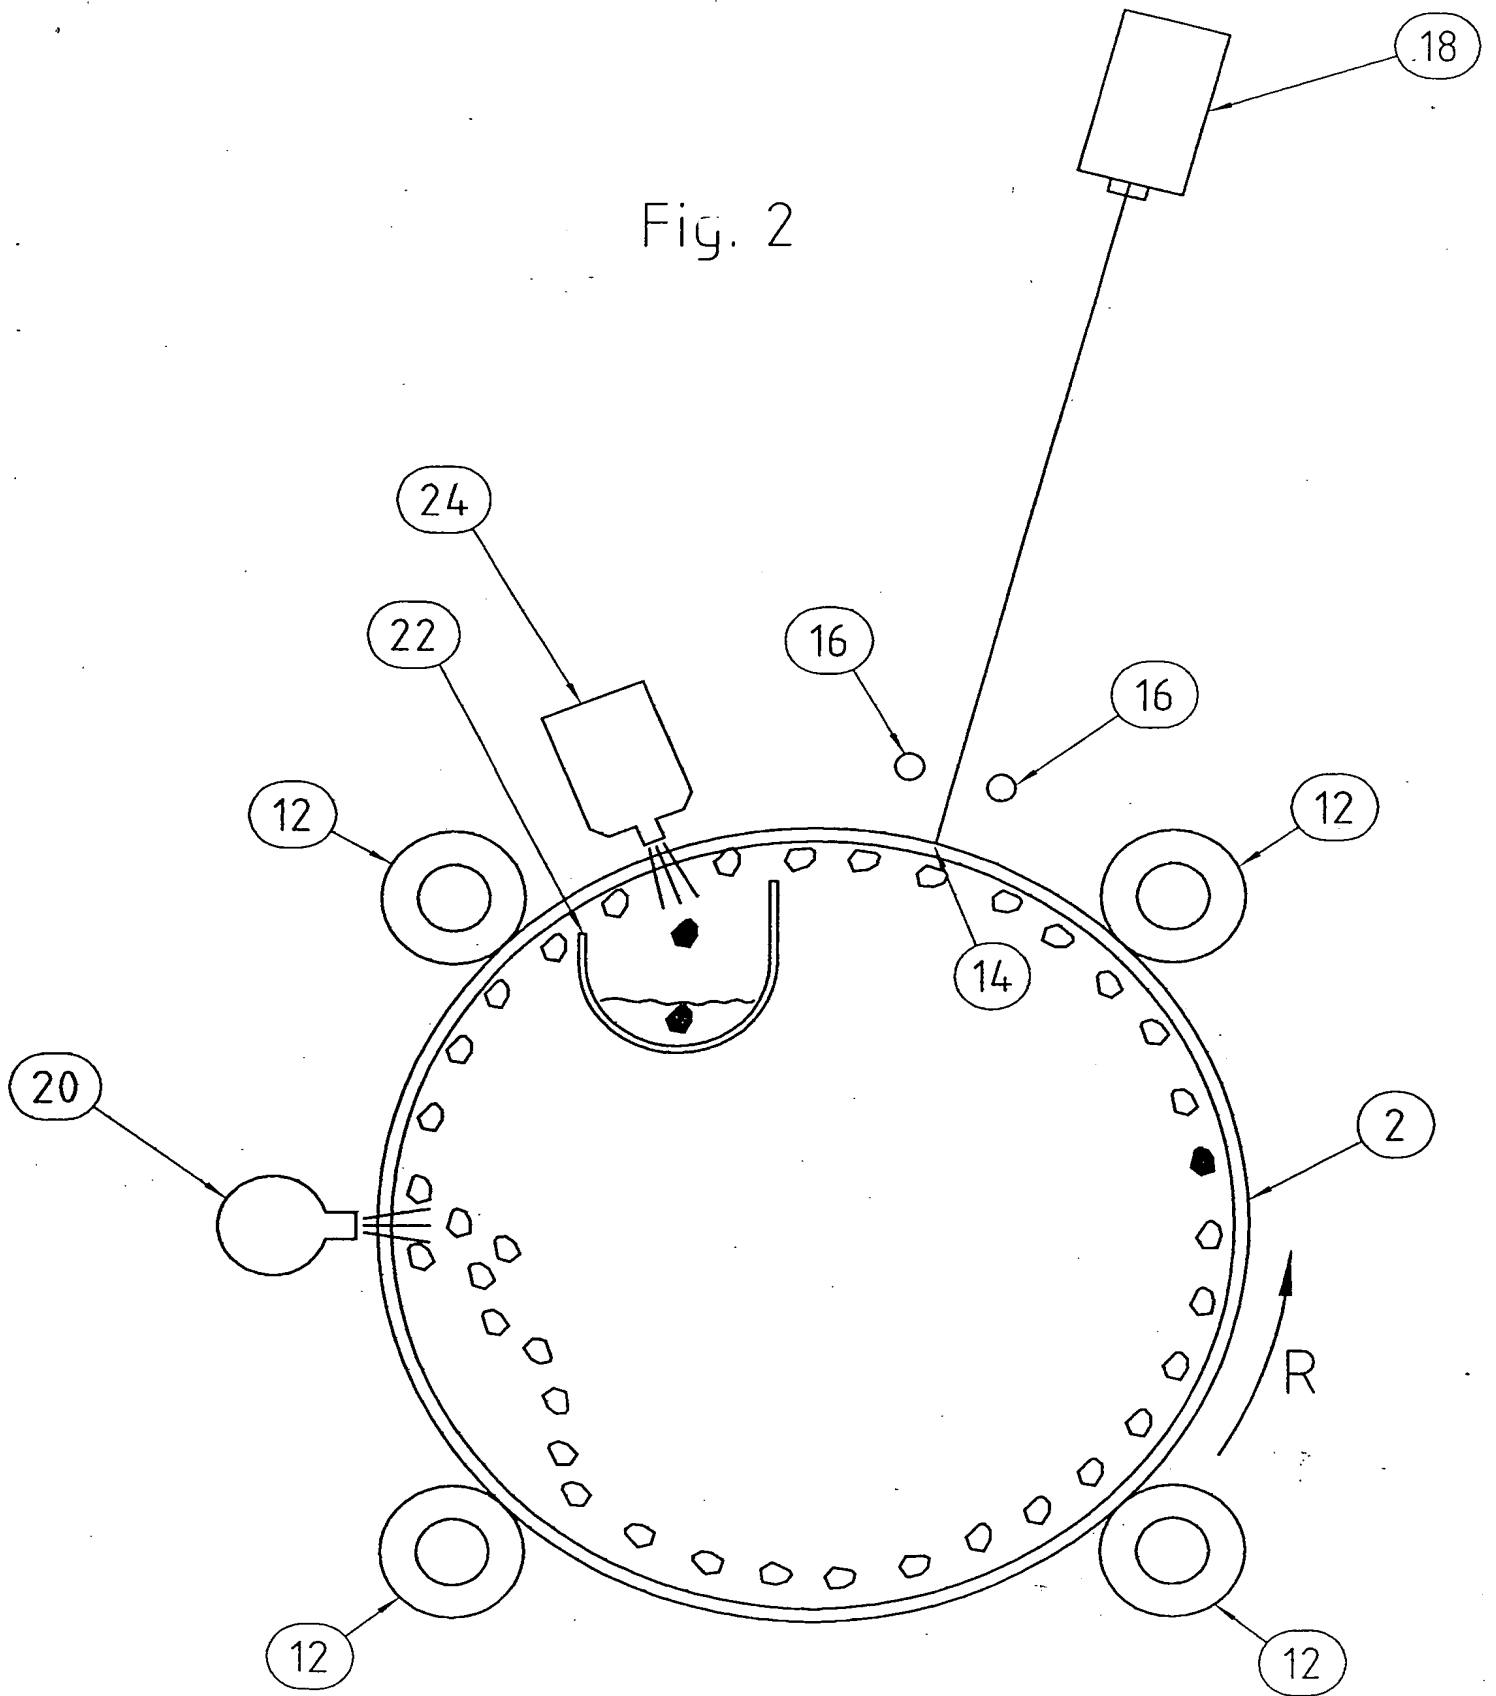

**THIS PAGE BLANK (USPTO)**




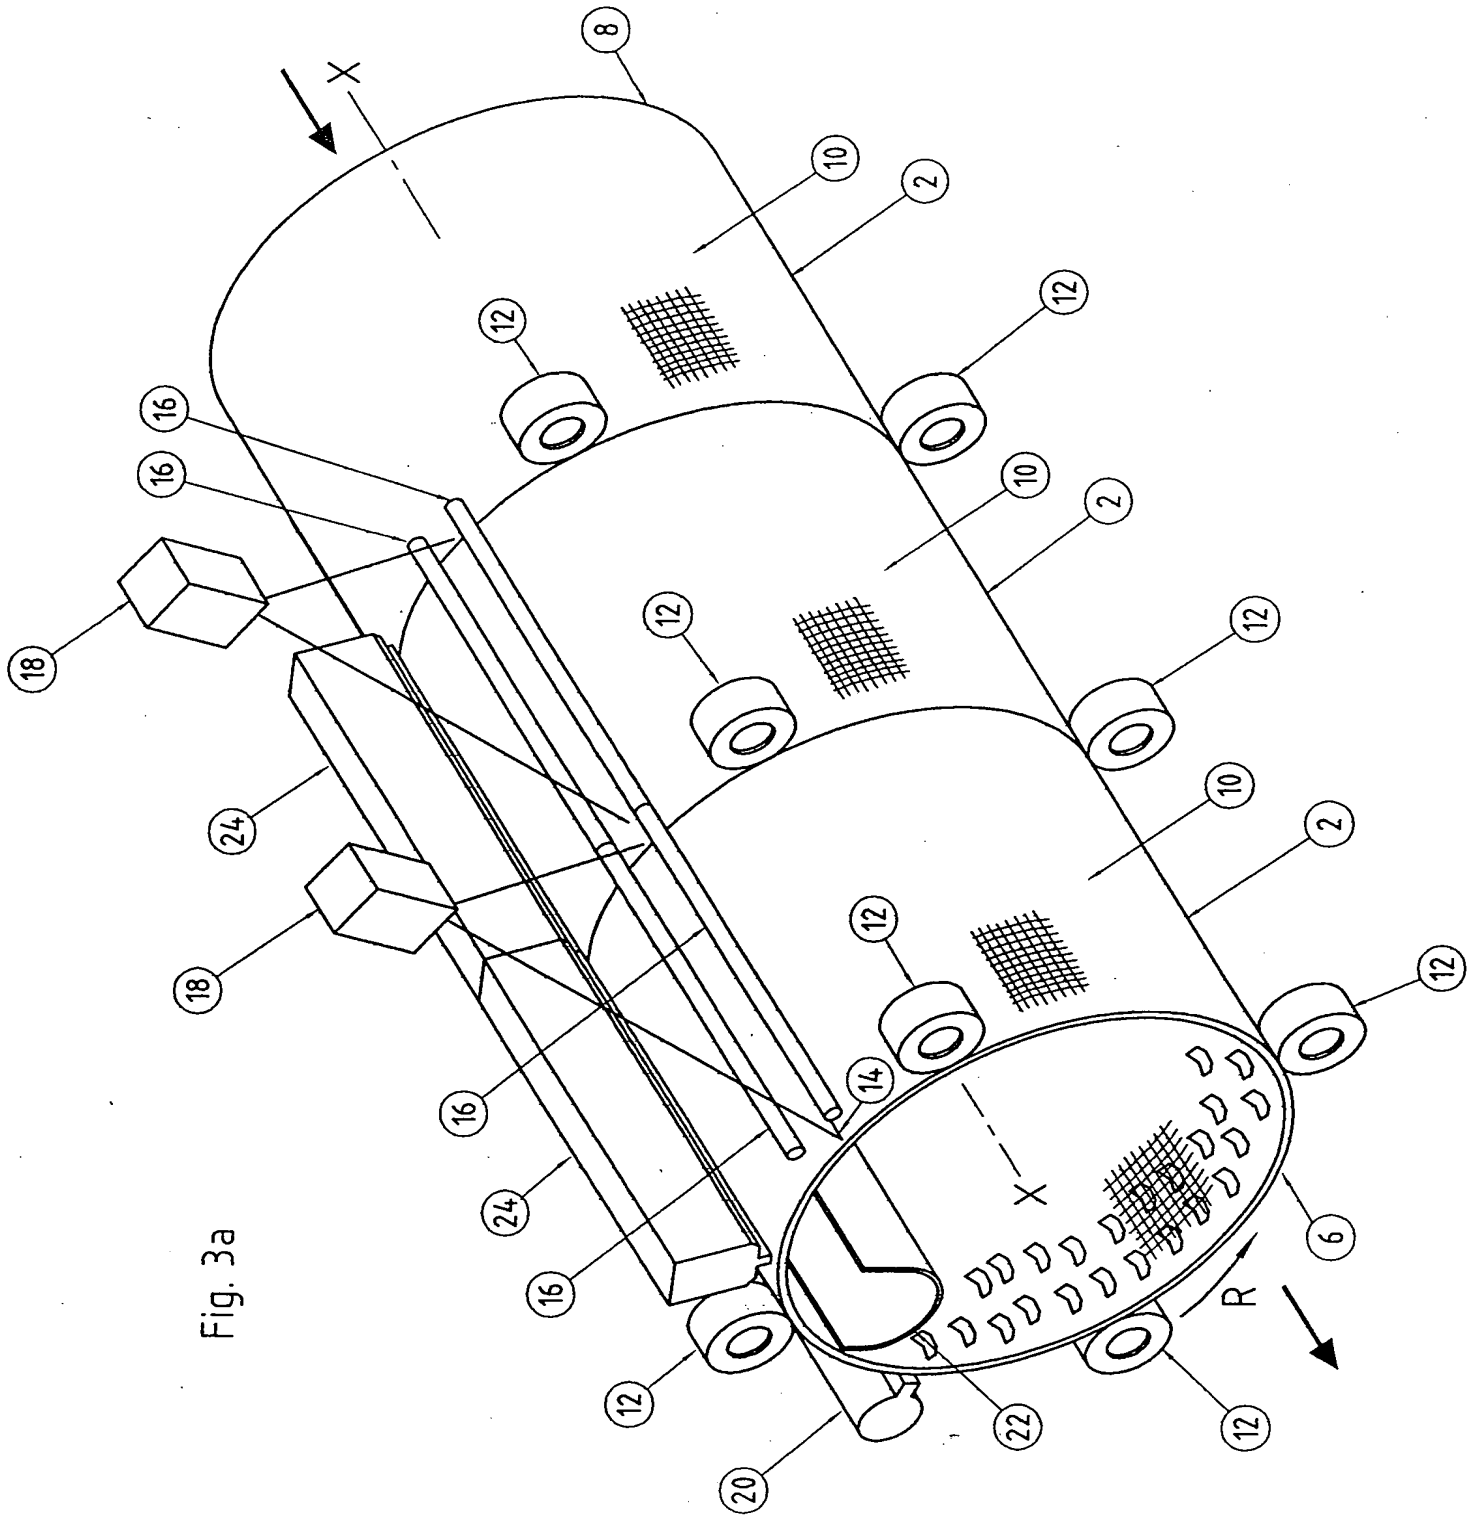


Fig. 3a

**THIS PAGE BLANK (USPTO)**

Fig. 3b

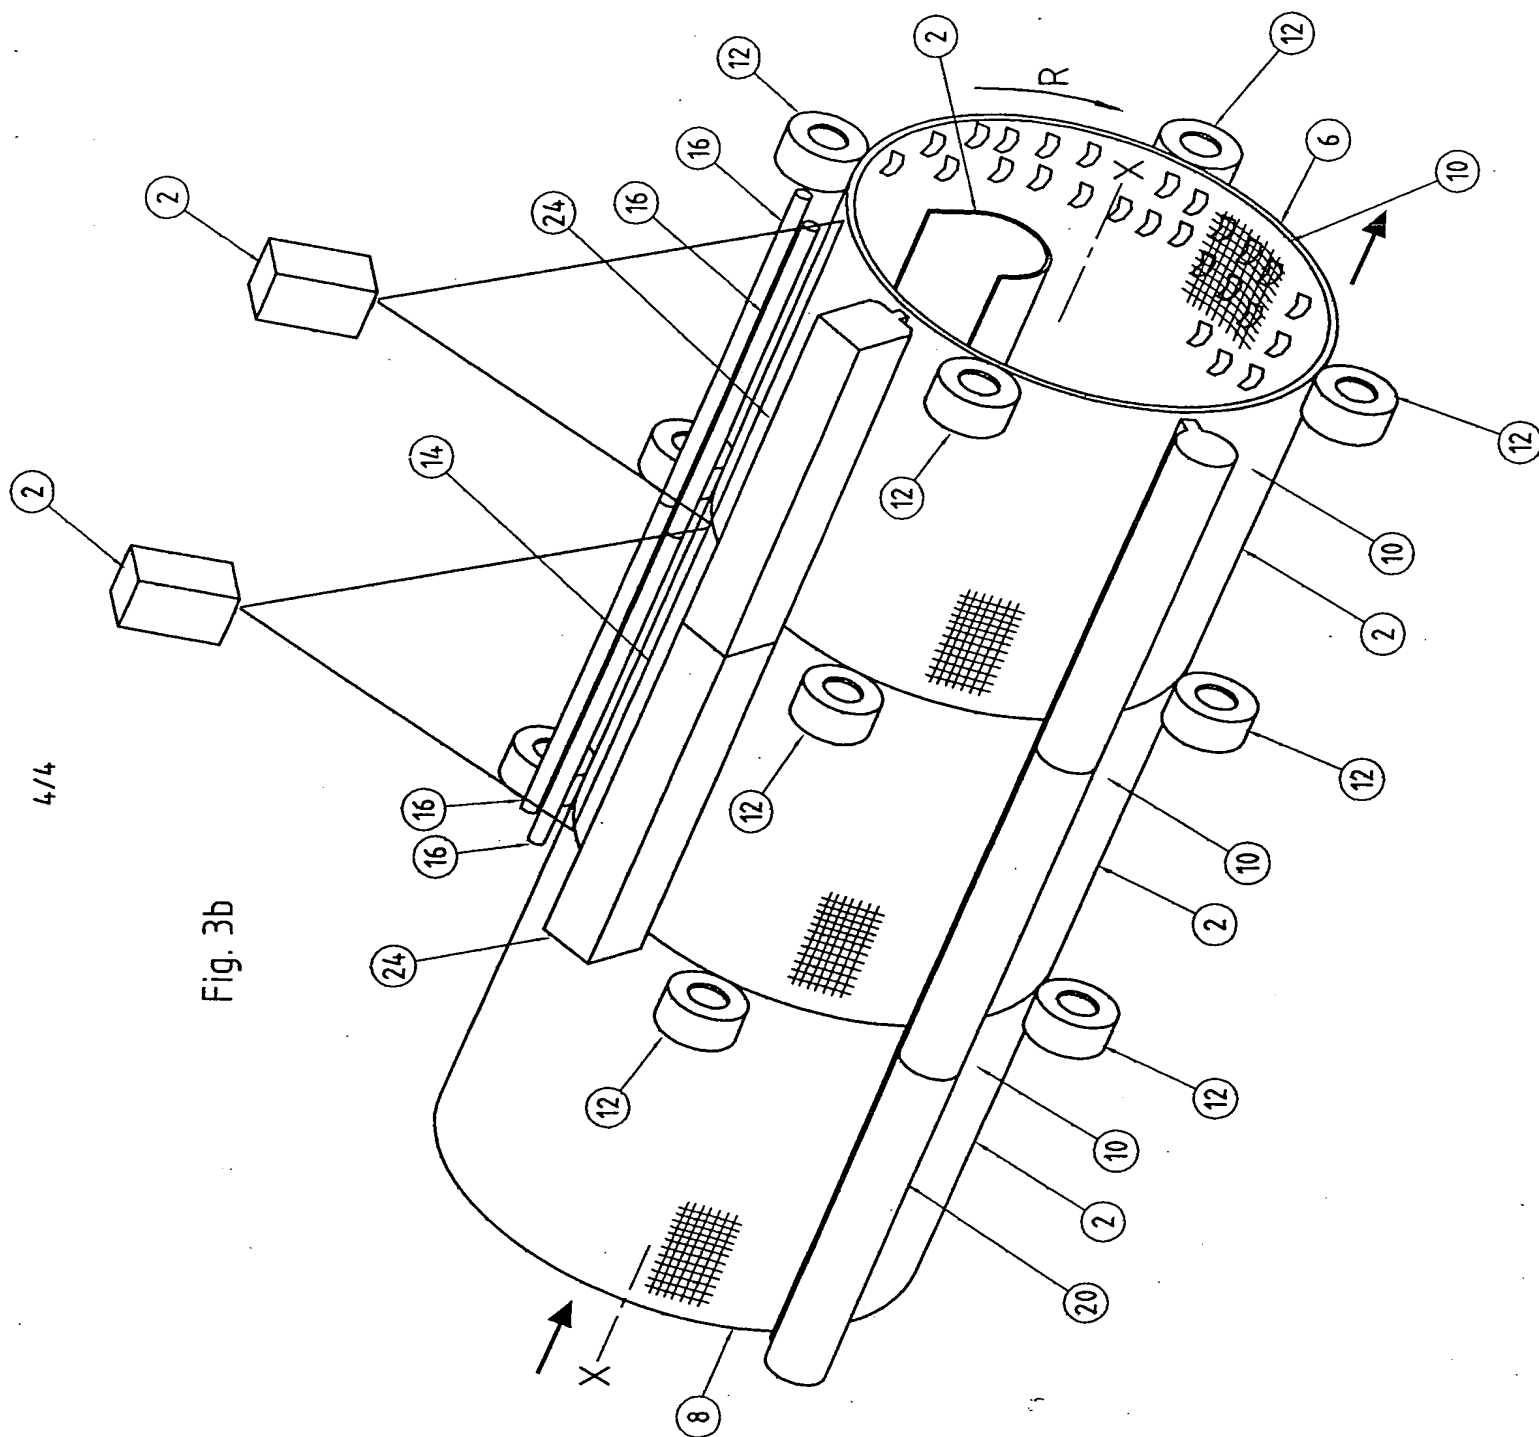

**THIS PAGE BLANK (USPTO)**